


MR plywood

(type of the plywood)

Plyterra Birch Interior

(name of the product)

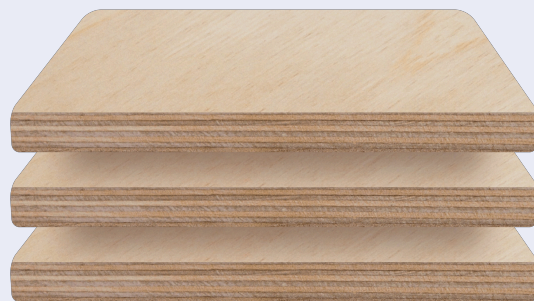

Specifications of the product:

Compliance with standard:	GOST 3916.1-2018
Thicknesses, mm:	3, 4, 6, 8, 9, 10, 11, 12, 14, 15, 17, 18, 20, 21, 24, 25, 27, 30
Sizes, mm:	Production site: Vlast truda 1525x1525, cut-to-size
Type of package:	plywood
Grades:	1/2 (B/BB), 2/2 (BB/BB), 2/3 (BB/CP), 2/4 (BB/C), 3/3 (CP/CP), 3/4 (CP/C), 4/4 (C/C)
Types of surface:	not-sanded (NS) and both sides sanded (S2)
Wood species:	birch
Density, kg/m ³ :	730
Moisture content, %:	5-10
Overlay:	no
Formaldehyde emission (limit value 3,5 mg/h x m ²):	0,1-0,3 mg/h x m ² formaldehyde emission class: E1
Static bending strength, MPa:	no less than 25
Static bending strength along the grain of face veneers, MPa:	no less than 30
Modulus of elasticity in static bending, MPa:	no less than 7000
Warranty period of storage:	5 years from the date of receipt by the consumer (according to GOST)

Tolerances:

Plywood sheets length and width	Size tolerances
1525	±3,0

Storage conditions:

Plywood is stored in horizontally stacked bundles, on pallets or on wooden support sticks, indoors, at a temperature ranging from -40°C up to +50°C at the humidity not exceeding 80%.